

Gooch & Housego



Conduction-cooled Acousto-Optic Q-Switch

I-QS041-1.8C10G-4-GH21

The 'Industry standard' conduction-cooled Acousto-Optic Q-Switch for end pumped Nd:YAG & Nd:YVO₄ lasers.

Utilising top grade Crystal Quartz for increased efficiency & thermal stability, with high quality optical finishing & high damage threshold anti-reflection coatings to provide high damage threshold & low insertion loss.

In addition to the specifications indicated, we also offer alternative wavelengths, RF frequencies, active apertures & an extensive range of mechanical housing configurations. We also offer full custom design & manufacturing, enabling our customers to achieve the perfect solution.

Our scientists and engineers are available to assist in selecting the most appropriate model of Q-Switch and also RF driver for your application.

Please contact our sales team for further information.

Key Features:

Industry standard Conduction-cooled High damage threshold High efficiency Custom configurations available

Application examples:

Material processing:

- Marking
- Engraving
- Scribing
- Surface treatment





General Specifications

Interaction material: Crystal Quartz Wavelength: 1064nm

Optical polarisation: Linear, vertical to base AR coating reflectivity: < 0.2% per surface

> 1GWcm⁻² Damage threshold: Transmission (single pass): > 99.6% RF frequency: 40.68MHz VSWR: < 1.2:1 Active aperture: 1.8mm Rise-time: 113ns/mm > 85% Loss modulation: 20W (max) RF power rating:


Ordering Codes

Storage temperature:

Explanation: I-QS041-1.8C10G-4-GH21 (Q-Switch, 41MHz, 1.8mm active aperture, compressional mode, Crystal Quartz, 1064nm, SMA female pigtail, GH21 housing).

-20 to +70degC

| | | - | Q | S | 0 | 4 | 1 | - | 1 | . | 8 | C | 1 | 0 | G | - | 4 | - | G | H | 2 | 1

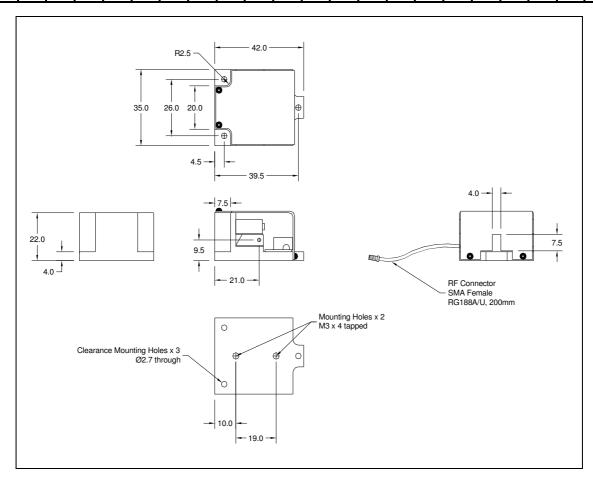

Contact: sales@goochandhousego.com

www.goochandhousego.com

As part of our policy of continuous product improvement we reserve the right to change specifications at any time

