


SPECIFICATIONS

OUTLINE DRAWING

AO Medium	TeO ₂
Acoustic Mode	Slow Shear, (110 Axis)
Acoustic Velocity	0.617 mm/μs
Wavelength	488 nm
Input Polarization	Elliptical
Output Polarization	Elliptical
Insertion Loss	<3%
Center Frequency (Fc)	100 MHz
RF Bandwidth	50 MHz
RF Power	< 1.2 Watts
Active Aperture	4 mm 'H' X 14 mm 'L'
Average Diffraction Efficiency	>75%
Flatness Across Bandwidth	<10%
Min Diffraction Efficiency	>70%
Peak Valley at 633 nm	<0.125
RMS at 633 nm	N/A
VSWR	2.0 : 1
Scan Angle	N/A
Time Bandwidth	1100

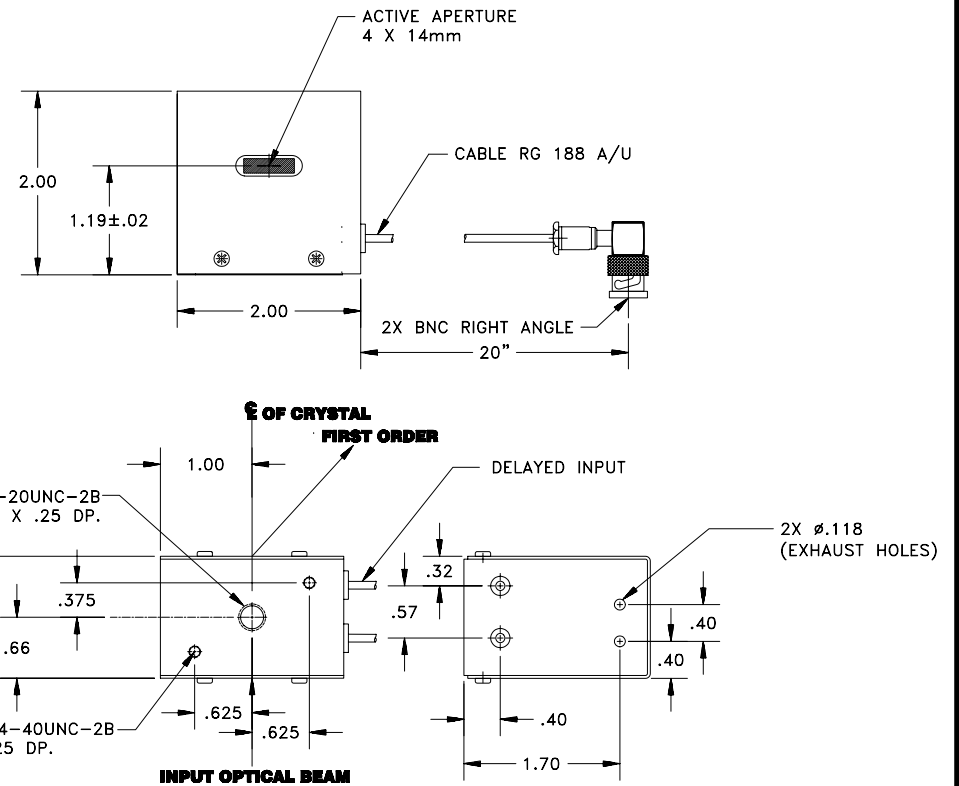

Notes:

1. Phased array input transducer.
2. Input impedance is 50 Ohms.
3. A delay box, p/n: 97-02010-01, is connected between the RF output of the driver and the two inputs of the deflector.

For Reference Only

amsTECHNOLOGIES
where technologies meet solutions

info@amstechnologies.com
www.amstechnologies-webshop.com

Contact us

THIS DOCUMENT IS THE PROPERTY OF CRYSTAL TECHNOLOGY, INC. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF CRYSTAL TECHNOLOGY AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF CRYSTAL TECHNOLOGY.

TOLERANCES: .XX .XXX	DR	Geri Scholz 8/22/2002	Crystal Technology, Inc.	
MATERIAL:	CHK		DESCRIPTION: AODF 4100	
FINISH:	APP		PART NUMBER:	REV:
	APP			