



Gooch & Housego



Document

05/16/13

Control

AOM Driver 2910 Series

1 to 4 Watt RF Drivers for
Acousto-Optic Modulators

The 2910 Series RF driver provides up to 4 Watts output power. Various types cover a frequency range of 80 to 350 MHz.

The maximum RF output power is adjustable by an internal potentiometer. The driver is available in either analogue or digital modulation control. The analogue modulation voltage controls the output power from 0 to 100% of the adjusted maximum power. The digital modulation control signal can switch on and off the RF power.

The driver can be operated with modulation frequencies (analogue and digital) up to 25% of the carrier frequency and 50 MHz maximum at the higher carrier frequencies.

Optimum EMC shielding and mechanical protection is achieved by an aluminium casing. The base plate serves for mounting and heat dissipation purposes.

Key Features:

- ☐ Frequency range 80 to 350 MHz
- ☐ RF output power up to 4 Watt
- ☐ RF on/off ratio ≥ 60 dB (Digital Modulation)
- ☐ RF on/off ratio ≥ 50 dB (Analogue Modulation)
- ☐ Constant output power design
- ☐ Models with a modulation frequency up to 50 MHz available
- ☐ Conductive cooling through base plate
- ☐ Compact casing

Applications:

- ☐ Fast modulation components for extra cavity applications, e. g. laser projection systems
- ☐ Frequency shifting



info@amstechnologies.com
www.amstechnologies-webshop.com



Contact: sales@goochandhousego.com

www.goochandhousego.com

As part of our policy of continuous product improvement we reserve the right to change specifications at any time.
97-02910-XX-50 Revision C

Technical Data

Supply Voltage	+24V DC
Supply Current	600 mA (nominal) with Pout = 1.0 W 625 mA (nominal) with Pout = 1.5 W 775 mA (nominal) with Pout = 2.5 W 825 mA (nominal) with Pout = 3.0 W 900 mA (nominal) with Pout = 4.0 W 2700 mA (nominal) with Pout = 20 W*
Output Impedance	50 Ω (nominal)
Maximum RF Power (adjustable)	< 0.1 W ... > Pout
Frequency Accuracy	$\pm 0.1\%$
Harmonic Distortion**	≤ -20 dBc***
Analogue modulation	
Impedance	50 Ω (nominal)
Voltage range @ 50 Ω	0 ... +1 V
RF ON / OFF ratio	≥ 50 dB****
Digital modulation	
Impedance	75 Ω (nominal)*****
Level	Standard TTL
RF ON / OFF ratio	≥ 60 dB
RF Output Frequencies	80, 110, 150, 200, 260 & 350 MHz
RF Rise/Fall Times	12 nsec @ 80 MHz (Rise = 10% to 90%) 9 nsec @ 110 MHz (Fall = 90% to 10%) 7 nsec @ 150 MHz 5 nsec @ 200 MHz 4 nsec @ 260 MHz 4 nsec @ 350 MHz

* A 20 W version available using external amplifier.

** Into 50 Ω load

*** Part numbers -16 and -17 are ≤ -15 dBc

**** Part numbers -12, -14 and -16 are ≥ 45 dB

***** Part number -11 is 600 Ω (nominal)

Connectors

RF output connector	SMA (female)
Modulation connector	SMC (male)
Power Supply connector	
Input	Solder terminal (filtered feed-thru)
Ground	Solder lug

Cooling, Dimensions, Weight

Cooling	Conduction
Pout	Base plate should be attached to suitable heat sink capable of dissipating:
1.0 W - 1.5 W	15 W
2.5 W - 3.0 W	20 W
4.0 W	22 W
Dimensions inches [mm]	
L x W x H	4 x 1.12 x 3.15 [102 x 29 x 80]
Weight lbs [kg]	0.53 [0.24] (nominal)

Environmental Conditions

Warm-up Time	5 minutes (nominal)
Base Plate Temperature	0° C to +60° C For optimum output power stability constant base plate temperature should be provided
Storage Temperature	-25°C to +85°C (non condensing)


Absolute Maximum Ratings

Supply Voltage	+28 VDC
Analogue Modulation	-1.5 V to +1.5 V
Digital Modulation	-0.5 V to +2.75 V
Operating Temperature	+65°C (base plate temperature)

Quality Standards

EU 2002/95/EC (RoHS)	Compliant
Burn-in	12 Hours min @ +25° C and Pout

Outline Drawing: (Dimensions in inches)

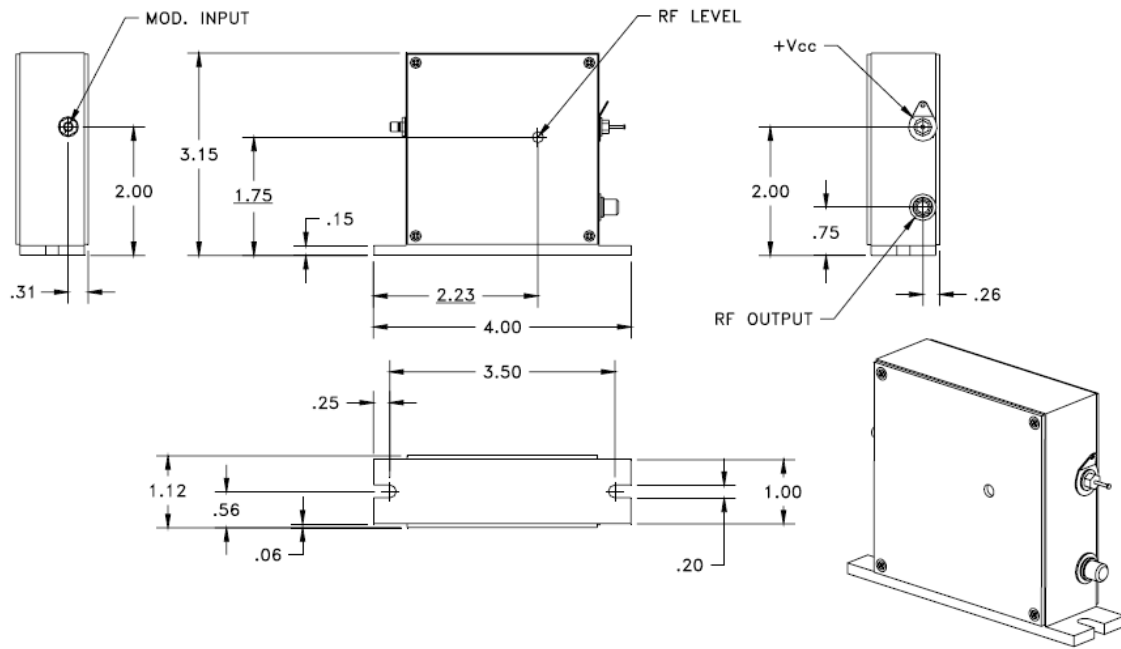

Variant List / Ordering Codes

1XXX AF-XIN0-X.X HCR

Code	Frequency MHz
080	80
110	110
150	150
200	200
260	260
350	350

Code	Modulation
A	Analogue
D	Digital

Code	RF Power Watts
1.0	1.0
1.5	1.5
2.5	2.5
3.0	3.0
4.0	4.0

Other Frequencies and customized versions available upon request.



amSTECHNOLOGIES
where technologies meet solutions

info@amstechnologies.com
www.amstechnologies-webshop.com

Contact us 