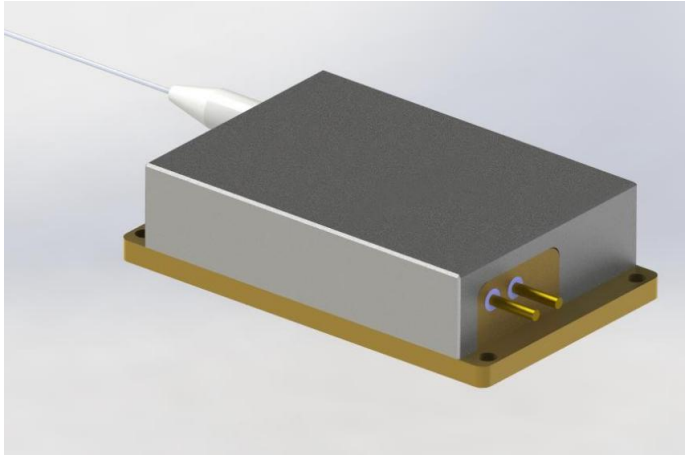


888nm 65W 200 μ m Fiber Coupled Diode Laser
K888BN0RN-65.00W (Customized Product)**Features:**

- ♦ 888nm wavelength
- ♦ 65W output power
- ♦ 200 μ m fiber core diameter
- ♦ 0.22 NA
- ♦ 1020nm-1200nm feedback protection

Applications:

- ♦ Fiber laser pumping

BWT Beijing's high power diode laser modules are manufactured by adopting specialized fiber-coupling techniques, resulting in volume products with a high efficiency, stability and superior beam quality. The products are achieved by transforming the asymmetric radiation from the laser diode chip into an output fiber with small core diameter by using special micro optics. Inspecting and burn-in procedures in every aspect come to a result to guarantee each product with the reliability, stability and long lifetime.

Our research staffs are constantly improving and innovating the processing technology in the producing process, based on the professional knowledge and experience accumulated in long-terms. We are also continuously developing new products to meet customers' specific needs.

At BWT Beijing, to provide high quality products with reasonable price is our always goal.

888nm 65W 200μm Fiber Coupled Diode Laser

K888BN0RN-65.00W (Customized Product)

Specifications (25°C)		Symbol	Unit	K888BN0RN-65.00W		
				Minimum	Typical	Maximum
Optical Data ⁽¹⁾	CW Output Power	P_o	W	65	-	-
	Center Wavelength	λ_c	nm	888±1		
	Spectral Width (FWHM)	$\Delta\lambda$	nm	< 1		
	Wavelength Locked Range	-	Å	$(I_{op}-2) \sim I_{op}$		
	Wavelength Shift with Temperature	$\Delta\lambda/\Delta T$	nm/°C	-	0.02	-
	Wavelength Shift with Current	$\Delta\lambda/\Delta I$	nm/A	-	0.03	-
Electrical Data	Electrical-to-Optical Efficiency	PE	%	-	43	-
	Threshold Current	I_{th}	A	-	1.2	-
	Operating Current	I_{op}	A	-	9	10
	Operating Voltage	V_{op}	V	-	17	19
	Slope Efficiency	η	W/A	-	7	-
Fiber Data ⁽²⁾	Core Diameter	D_{core}	μm	-	200	-
	Numerical Aperture	NA	-	-	0.22	-
	Total Fiber Length	L_f	m	-	2.0	-
	Fiber Loose Tubing Diameter	-	mm	0.9		
	Minimum Static Bending Radius	-	mm	88	-	-
	Fiber Termination	-	-	SMA905		
Others	ESD	V_{esd}	V	-	-	500
	Storage Temperature ⁽²⁾	T_{st}	°C	-20	-	70
	Lead Soldering Temperature	T_{ls}	°C	-	-	260
	Lead Soldering Time	t	sec	-	-	10
	Operating Temperature ⁽³⁾	T_{op}	°C	25	-	35
	Relative Humidity	RH	%	15	-	75

(1) Data measured under operation output at 65W@25°C.


(2) A non-condensing environment is required for operation and storage.

(3) Operating temperature defined by the package case. Acceptable operating range is 25°C~35°C, but performance may vary.

(4) Wavelength stabilized to >90% power in band of 886.5nm to 889.5nm

888nm 65W 200 μ m Fiber Coupled Diode Laser K888BN0RN-65.00W (Customized Product)

Package Dimensions (mm)

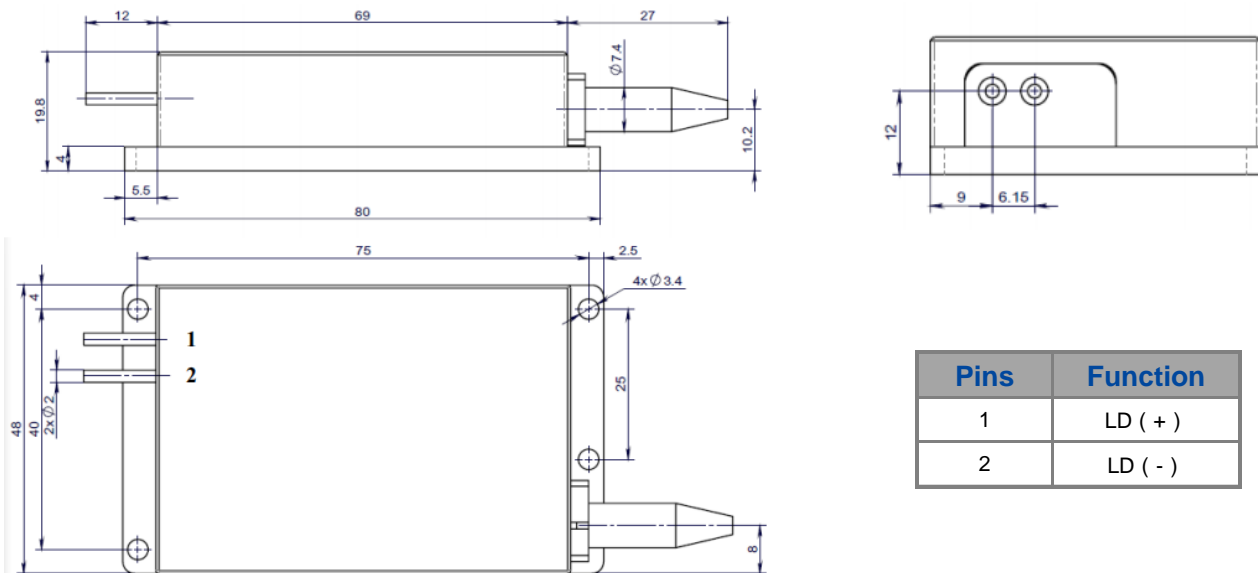

OPERATING NOTES

- ◆ Avoid eye and skin exposure to direct radiation during operation.
- ◆ ESD precautions must be taken during storage, transportation and operation.
- ◆ Short-circuit is required between pins during storage and transportation.
- ◆ Please connect pins to wires by solder instead of using socket when operation current is higher than 6A. Soldering point should be close to the root of the pins. Soldering temperature should be lower than 260°C and time shorter than 10 second.
- ◆ Make sure the fiber output end is properly cleaned before operation of laser. Follow safety protocols to avoid injury when handling and cutting the fiber.
- ◆ Use constant current power supply to avoid surge current during operation.
- ◆ Laser diode must be used according to the specifications.
- ◆ Laser diode must work with good cooling.
- ◆ Operation temperature ranges from 25°C to 35°C.
- ◆ Storage temperature ranges from -20°C to +70°C.



Declaration: information and specifications contained herein are deemed to be reliable and accurate. BWT Beijing reserves the right to change, alter or modify the design and specifications of these products at any time without notice.20-11.