


808nm 40W High Power Fiber Coupled Diode Laser K808DN1RN-40.00W(Optional Product)

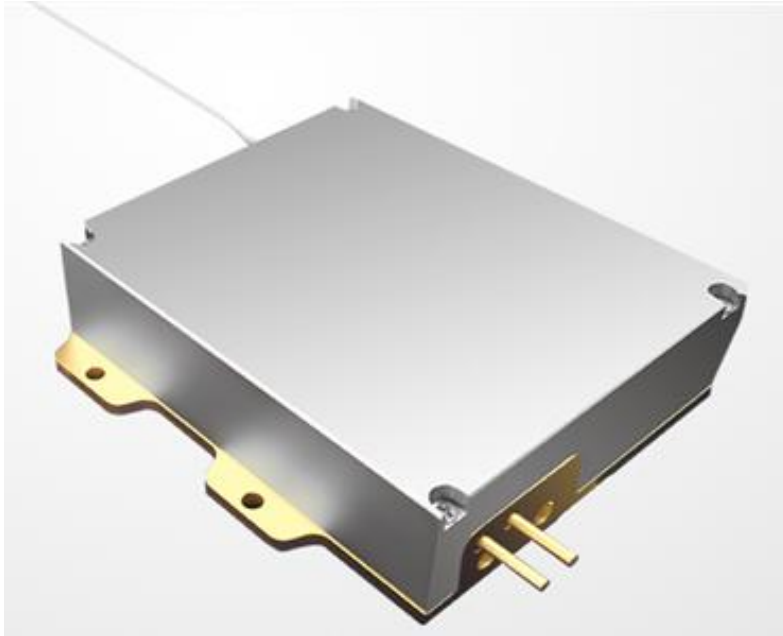

Features:

- ♦ 808nm wavelength
- ♦ 40W output power
- ♦ 106.5μm fiber core diameter
- ♦ 0.22N.A.

Applications:

- ♦ Fiber laser pumping

BWT Beijing's High Power Diode Laser Modules are manufactured by adopting specialized fiber-coupling techniques, resulting in volume products with a high efficiency, stability and superior beam quality. The products are achieved by transforming the asymmetric radiation from the laser diode chip into an output fiber with small core diameter by using special micro optics. Inspecting and burn-in procedures in every aspect come to a result to guarantee each product with the reliability, stability and long lifetime.

Our research staffs are constantly improving and innovating the processing technology in the producing process, based on the professional knowledge and experience accumulated in long-terms. We are also continuously developing new products to meet customers' specific needs.

At BWT Beijing, to provide high quality products with reasonable price is our always goal.

808nm 40W High Power Fiber Coupled Diode Laser

K808DN1RN-40.00W(Optional Product)

Specifications(25℃)		Symbol	Unit	K808DN1RN-40.0W		
				Minimum	Typical	Maximum
Optical Data ⁽¹⁾	CW-Output Power	P _o	W	40	-	-
	Center Wavelength	λ _c	nm	808±3nm		
	Spectral Width (FWHM)	Δλ	nm	6		
	Wavelength Shift with Temperature	Δλ/ΔT	nm/℃	-	0.3	-
	Wavelength Shift with Current	Δλ/ΔI	nm/A	-	1	-
Electrical Data	Electrical-to-Optical Efficiency	PE	%	-	40	-
	Operating Current	I _{op}	A	-	-	5.5
	Threshold Current	I _{th}	A	-	0.85	-
	Operating Voltage	V _{op}	V	-	-	20
	Slope Efficiency	η	W/A	-	9	-
Fiber Data ⁽²⁾	Core diameter	D _{core}	μm	-	106.5	-
	Cladding diameter	D _{clad}	um	-	125	-
	Buffer diameter	D _{buf}	um	-	250	-
	Numerical Aperture	N.A.	-	-	0.22	-
	Total Fiber Length	L _f	m	-	2	-
	Fiber Loose Tubing Diameter/Length	-	μm	0.9mm PTFE 180cm		
	Minimum Bending Radius	-	mm	60	-	-
	Fiber termination	-	-	-	FPT	-
Feedback Isolation ⁽³⁾	Wavelength Range	λ	nm	1040~1200		
	Isolation	-	dB	-	30	-
Others	ESD	V _{esd}	V	-	-	500
	Storage Temperature (Non-operating) ⁽⁴⁾	T _{st}	℃	-20	-	70
	Lead Soldering Temp	T _{ls}	℃	-	-	260
	Lead Soldering Time	t	sec	-	-	10
	Operating Case Temperature	T _{op}	℃	15	-	35
	Relative Humidity	RH	%	15	-	75

(1) Data measured under operation output at 40W@25℃.


(2) Other fiber type customized according to customers requirements.

(3) Other feedback isolation customized according to customers requirements.

(4) A non-condensing environment is required for operation and storage conditions are from -20 to +70 ℃ with relative humidity between 15 to 75 %.

808nm 40W High Power Fiber Coupled Diode Laser K808DN1RN-40.00W(Optional Product)

Package Dimensions (mm)

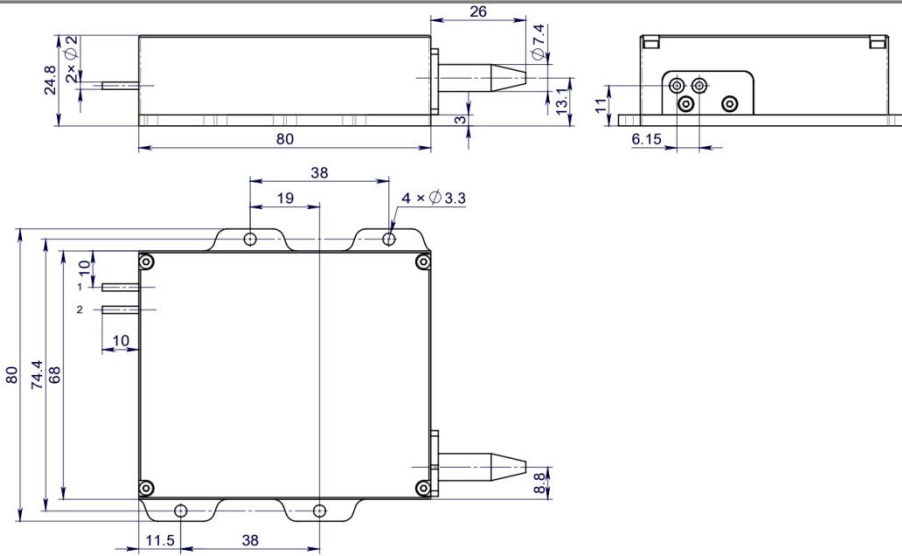

(Pin)	(Function)
1	LD (+)
2	LD (-)

OPERATING NOTES

- ◆ ESD protection measures must be taken during storage, transportation and operation.
- ◆ Solder pins instead of using socket for electrical connections for modules with operating current higher than 6A. Soldering temperature should be lower than 260℃ and soldering duration should be less than 10 seconds.
- ◆ Make sure the fiber output end is properly cleaned before operation of laser. Follow safety protocols to avoid injury when handling and cutting the fiber.
- ◆ Fiber bending radius should be bigger than 80mm to avoid leaking of laser light.
- ◆ Diode laser should be operated according to the specification. Over-drive the diode laser will reduce its lifetime.
- ◆ Avoid eye and skin exposure to direct radiation during operation.
- ◆ Use constant current power supply. Current surge may damage the laser.
- ◆ Diode laser must be operated under good cooling condition.



Declaration: information and specifications contained herein are deemed to be reliable and accurate. BWT Beijing reserves the right to change, alter or modify the design and specifications of these products at any time without notice.18-2