
SPECIFICATIONS

AO Medium TeO2 Acoustic Mode Shear, off axis .66 mm/µs Acoustic Velocity Wavelength 532 nm Input Polarization Horizontal **Output Polarization** Vertical 3% Insertion Loss Center Frequency (Fc) 87 MHz RF Bandwidth 55 MHz **RF** Power <1.5W Active Aperture 8.5mm Diameter Average Diffraction Efficiency N/A Flatness Across Bandwidth N/A Min Diffraction Efficiency 70% Peak Valley at 633 mm $\lambda/4$ RMS at 633 mm N/A **VSWR** 2.2:1 Scan Angle N/A

OUTLINE DRAWING

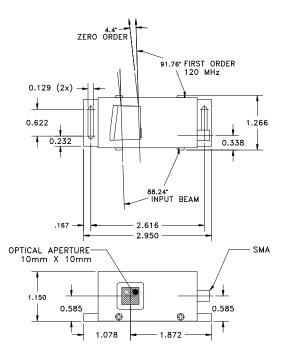

Notes:

Time Bandwidth



Document

N/A

09/13/13

Control

THIS DOCUMENT IS THE PROPERTY OF GOOCH & HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH & HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTERS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH & HOUSEGO.

TOLERANCES: .XX ± .01 .XXX ± .005	DR	Geri Scholz 9/3/2013	♠ Gooch & Housego		
MATERIAL:	СНК		AODF 4090)-7	
FINISH:	APP		8.5mm Aper., 532nm		
	APP		PART NUMBER: 97-03210-01	REV:	SHEET 1 OF 1