

SPECIFICATIONS

Modulation Input

Input Impedance 50 Ohms
Analog Input (SMC) 0 to +1.0 VDC

RF Output

Center Frequency (Fc) 200 MHz \pm 0.1%
Output Power (SMA Female) 2.5 W
Rise/Fall Time 5 nsec Max
RF Contrast Ratio 50 dB min
Harmonic Distortion -20 dBc
Output Impedance 50 Ohms
Output VSWR 1.5 : 1 Max
Power Supply Voltage +24 V @ 775 mA

Notes:

1. Output power factory set to 2.5 W at 1.0 Volt input. Power stability less than 5% over the heat sink's ambient temperature range of 0 - 40° C, after 5 minute warm-up.
2. When calculating the contrast ratio, it is understood that only the power of the 200 MHz fundamental shall be used. The higher harmonics have no effect on the AO modulator's performance.
3. RoHS compliant.




amstechnologies
where technologies meet solutions

info@amstechnologies.com
www.amstechnologies-webshop.com

Contact us



OUTLINE DRAWING

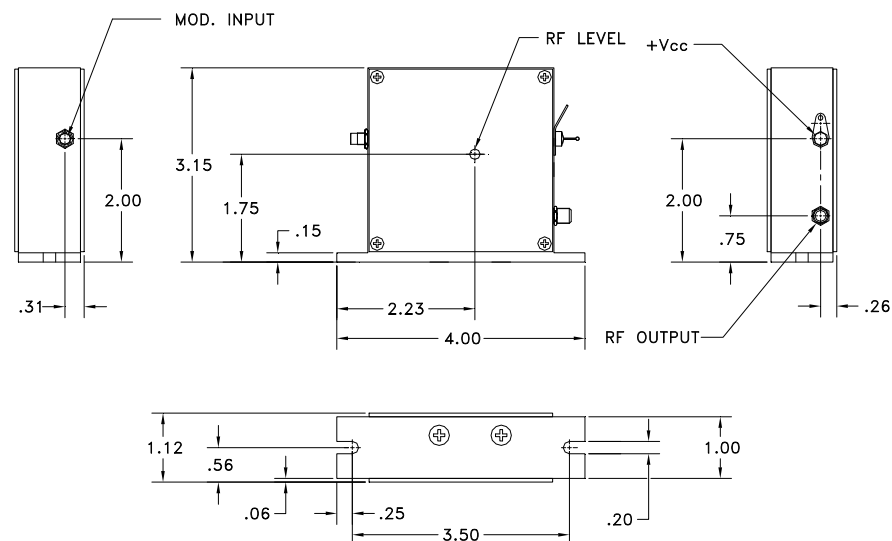

Document

10/16/13

Control

THIS DOCUMENT IS THE PROPERTY OF GOOCH AND HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH AND HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH AND HOUSEGO.

TOLERANCES: .XX \pm .01 .XXX \pm .005	DR	T. Moon 8/14/2013			
MATERIAL: 	CHK		DESCRIPTION: AODR 1200AF-AINA-2.5 HCR		
FINISH: 	APP		PART NUMBER: 97-02910-04	REV: C	1 of 1
	APP				