

SPECIFICATIONS

Modulation Input

Input Impedance
Digital Input (SMC)


75 Ohms
Standard TTL

RF Output

Center Frequency (Fc)
Output Power (SMA Female)
Rise/Fall Time
RF Contrast Ratio
Harmonic Distortion
Output Impedance
Output VSWR
Power Supply Voltage

200 MHz \pm 0.1%
2.5 W
5 nsec Max
50 dB min
-20 dBc
50 Ohms
1.5 : 1 Max
+24 V @ 775 mA

OUTLINE DRAWING

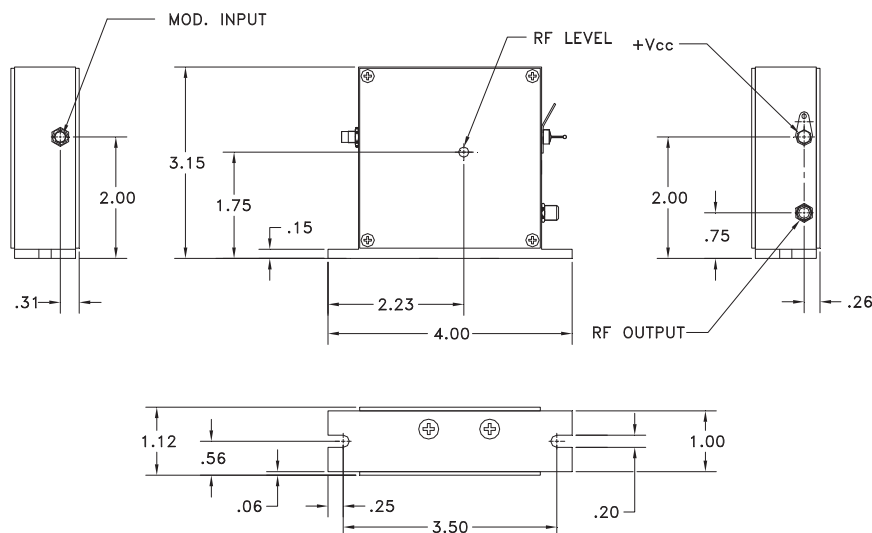

Notes:

- Output power factory set to 2.5 W at 2.4 Volt input. Power stability less than 5% over the heat sink's ambient temperature range of 0 - 40° C, after 5 minute warm-up.
- When calculating the contrast ratio, it is understood that only the power of the 200 MHz fundamental shall be used. The higher harmonics have no effect on the AO modulator's performance.
- RoHS compliant



amstechnologies
where technologies meet solutions

info@amstechnologies.com
www.amstechnologies-webshop.com

Contact us

Document

07/14/15

Control

THIS DOCUMENT IS THE PROPERTY OF GOOCH AND HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF GOOCH AND HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH AND HOUSEGO.

| | | | | | |
|---|-----|--------------------------|---|------------------|--------|
| TOLERANCES: .XX \pm .01 .XXX \pm .005 | DR | Geri Scholz 6/22/2015 | | | |
| MATERIAL: | CHK | | DESCRIPTION: AODR 1200AF-DINA-2.5 HCR | | |
| | APP | | | | |
| | APP | | PART NUMBER: 97-02910-01 | REV: H | 1 of 1 |