


SPECIFICATIONS

AO Medium	Crystal Quartz
Acoustic Mode	Longitudinal
Acoustic Velocity	6.32 mm/μs
Wavelength	266 nm
Input Polarization	90° to Mounting Plane
Output Polarization	90° to Mounting Plane
Insertion Loss	<2%
Center Frequency (Fc)	210 MHz
RF Bandwidth	130 MHz
RF Power	5.0W nominal
Active Aperture	1mm 'H' x 69mm 'L'
Average Diffraction Efficiency	>80%, 83% TYP.
Flatness Across Bandwidth	40%
Min Diffraction Efficiency	>58%
Peak Valley at 633 nm	.100
RMS at 633 nm	.05
VSWR	<1.7:1
Scan Angle	N/A
Time Bandwidth	N/A

OUTLINE DRAWING

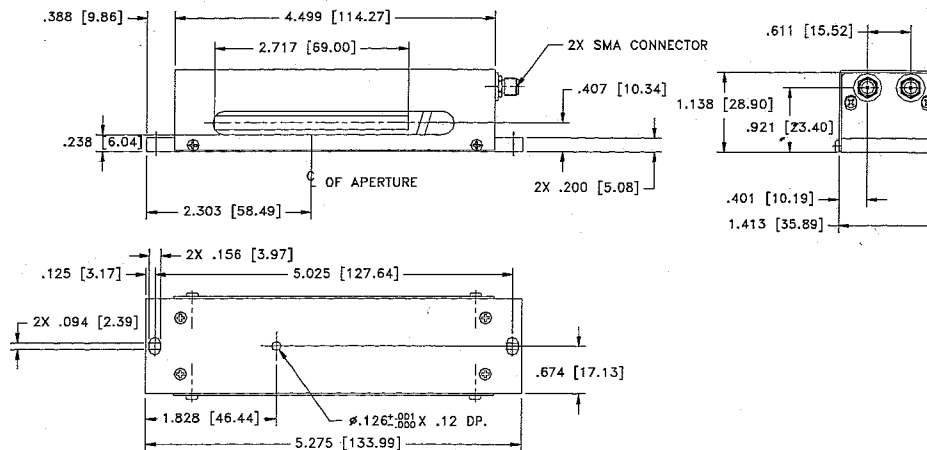

Notes:

1. Delay/splitter box is included but not shown.
2. (DEmax-DEmin)/DEave.
3. RF Burn In: 3W/channel, 48hrs

DOCUMENT CONTROL

OCT 06 2006

info@amstechnologies.com
www.amstechnologies-webshop.com

THIS DOCUMENT IS THE PROPERTY OF CRYSTAL TECHNOLOGY, INC. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES OF CRYSTAL TECHNOLOGY AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTERS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF CRYSTAL TECHNOLOGY.

TOLERANCES: XX ± .01 XXX ± .005	DR	T. Ng 9/28/2006	Crystal Technology, Inc.	
MATERIAL:	CHK: R.D. 9/20/06	DESCRIPTION: AODF 4200-6, 266nm Two Element Phased Array		
FINISH:	APP	PART NUMBER: 97-02890-02	REV: A	SHEET 1 OF 1