

FBG SPECIFIC APPLICATION TYPE


ARTICLE GTL-FBG-RH-880

Femtosecond FBGs can make into all optical transparent fiber materials with a broad variety of fiber coatings without strip the coating from fiber and without recoated in future FBGs written in radiation resistant pure silica core fibers are ideal for using in atomic energy industry, aero-space application and other Radiation Environments.

RADIATION HARD FBG



info@amstechnologies.com
www.amstechnologies-webshop.com

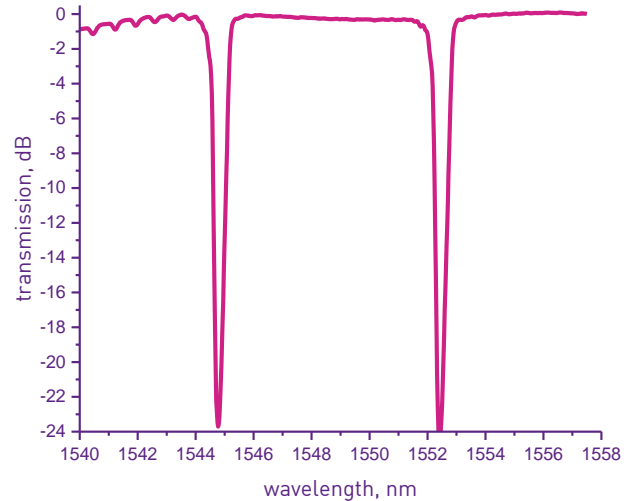

FBG CHARACTERISTICS	GTL-FBG-RH-880	TOLERANCE/NOTE
Wavelength range, nm	1000 ÷ 2300	± 0.1 ÷ ± 1 custom request
Types of fiber	Single-Mode, PM, Rad resistance	or custom
Reflectivity, %	0.5 ÷ 99	2 ÷ 5 custom request
Bandwidth (FWHM), nm	0.3 ÷ 0.5	custom request
SLSR, dB	~ 8	custom request
FBG Pigtail Length, m	≥ 0.5	or custom
FBG inscription thought the fiber protective coating	Acrylate, Polyimide	or custom
Additional FBG coating (on request)	Aluminium, Copper	or custom
Tensile Strength, kpsi	> 100	
Optical Connector	Bare fiber, FC/APC, LC/APC	or custom

The configuration can be changed at the customer's request. The parameters specified in this specification can be changed in accordance with the terms of reference.