

KI 6610 Series

Handheld Fiber Inspection Microscope

Optical Communications Test Applications

- Optical connector end face inspection in field or factory
- Multimode, single mode, MPO, POF fiber
- Inspects both simplex and duplex connectors



Revision 29

The KI 6610 Handheld FiberSafe Inspection Microscope is the microscope of choice to check fiber optic connector end face quality. It provides the state of the art in eye safety.

A combination of versatile and rugged design, easy operation, quality optics and durable construction ensures that this equipment will enhance the performance of installation and maintenance staff.

Options are suitable for all fiber types including SM / MM / MPO / POF, and many connector styles.

Features

- Compact, lightweight, reliable
- Excellent image quality & depth of focus
- Easy focus and image centring
- Stable LED illumination with timer
- Triple-mode illumination: coaxial, oblique & core
- Enhanced eye safety for red and infra-red light
- Long operation from AAA battery
- Micro-USB power input & low battery indication
- Tripod & lanyard mount
- View & store images on PC with optional camera
- Universal connector adaptors for most simplex and duplex connectors
- MPO connectors, multimode & single mode
- x200, x400, x40 magnification versions
- Supplied with soft carry pouch
- 3 years standard warranty
- Made in Australia

KI 6610 Series – Handheld Fiber Inspection Microscope

The FiberSafe Microscope is used to inspect fiber optic connectors for quality and dirt, and offers improved overall performance and features. x200 magnification is ideal for general installation & maintenance checking by entry level staff, on single mode, multimode or HCS fiber. Faults that cannot be seen are unlikely to affect connector performance, focusing is easier, and battery life is longer.

The x200 option is also used with the range of MPO adaptors for checking any style of MPO tip. The adaptor includes a traversing mechanism, and multiple fiber rows are easily viewed using the X-Y adjustment.

x400 magnification is ideal for high-end field use, in-house QA, factory, laboratory etc.

x40 magnification is optimized for 1 mm POF end face inspection. It also optimized to work with KI28800 series source for MPO cable verifications.

Ease of use and superb image quality make for simple and efficient operation. The X-Y image position is easy to optimize, and focusing is improved. Light weight, ergonomic controls and timed illumination make

for easy one-hand operation, so the other hand is free to move the connector as needed. Triple-mode illumination gives maximum flexibility. Coaxial illumination gives the highest level of image detail. Oblique illumination shows only major defects and contaminants; Core illumination shows continuity and sub-surface cracks.

Screw-on universal adaptors suit most modern optical connectors, including duplex assemblies. Connector-specific APC adaptors provide optimized performance by correctly aligning the ferrule tip.

Power is either by 1 x AAA alkaline battery, with low battery indicator, or from external micro-USB. Illumination level is unaffected by battery voltage.


The unique in-built eye safety filter blocks both red and infra-red light. This makes the microscope eye-safe with visual fault locators up to +20 dBm / 100 mW and at operational wavelengths up to +30 dBm / 1 Watt, power levels that are unlikely to be exceeded even under fault conditions.

Viewing and storage of images on a computer is achieved by replacing the standard eyepiece with an optional 1.3M pixel digital camera.


TRIPLE-MODE ILLUMINATION:

1) Coaxial illumination

Coaxial illumination maximizes the detail seen by the user. Because the light travels along the same axis as the sample inserted into the microscope, fine scratches and contamination are easily visible.

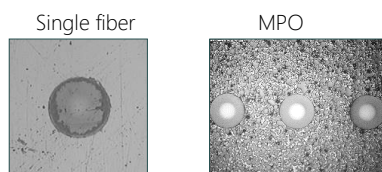


i) The x200 Images with Coaxial illumination



ii) The x40 Image with Coaxial illumination

2) Oblique illumination

In oblique illumination, the light from the LED hits the end-face at an angle, making the core clearly visible and allowing the user to readily see any surface debris or contamination. The amount of scratches seen on the ferrule is limited,



The x200 Image with Oblique illumination

3) Core illumination

Core illumination shows the fiber core, or for continuity testing.

The user plugs the far end of a patch lead into a built-in white LED. This easily demonstrates fiber continuity, and can also find sub-surface cracks.



The x200 Image with Core illumination

OPTICAL SAFETY:

Operators should comply with relevant company policy, standards or good practice on optical safety. This equipment greatly enhances practical eye safety in accordance with IEC60825-2 Ed 3.1 as follows:



1.3MP DIGITAL EYEPIECE TO CAPTURE & STORE IMAGES ON A PC:



SPECIFICATIONS

Parameters	Value
Dimensions	184.4 mm (L) x 49.3 mm (W) / 7.3" x 1.9"
Weight	0.21 kg / 0.47 lb.
Power	1 AAA battery 300 hours for coaxial illumination for KI 6610 75 hours for coaxial illumination for KI 6611 External power via micro-USB Low battery indicator
LED life	100,000 hours
Optical Magnification	x40 or x200 or x400 versions
Max viewable area diameter	5mm (for 40x version) 1 mm (for 200x version) 0.5 mm (for 400x version)
Eye Safety Filter	Built-in, see Optical Safety specifications on page 2 of this brochure
Controls	Auto-time off
Triple-mode illumination	1) Coaxial; 2) Oblique; 3) Core illumination
Microscope damage power level	+30 dBm
Operating temperature	-15 to 55°C
Storage temperature	-25 to 70°C
Relative humidity	95%
Warranty	3 years

Technical data is subject to change without notice as part of our program of continuous improvements. Patents Pending.

ORDERING INFORMATION

Description	Part number
Instrument, Microscope Optical 40x, 2.5 mm Univ	KI 6608
Instrument, Microscope Optical 200x, 2.5 mm Univ	KI 6610
Instrument, Microscope Optical 400x, 2.5 mm Univ	KI 6611

Note 1: The x20 eyepiece can be easily removed and changed by the user if required.

STANDARD ACCESSORIES

Description	Quantity
Option, Scope Adaptor 2.5 mm Universal (OPT681)	1
Type-A to Type-B micro USB cable	1
AAA Battery	1
Wrist strap	1
Soft carry pouch	1
Operation manual	1
QA certificate	1

OPTIONAL ACCESSORIES

Description	Part number
Option, Scope Digital Eyepiece, 1.3 MP	OPT684

OPTIONAL INTERCHANGEABLE CONNECTOR ADAPTORS

Description	Part number
Option, Scope Adaptor LC APC	OPT661A ²
Option, Scope Adaptor SC APC	OPT662A ²
Option, Scope Adaptor FC APC	OPT663A ²
Option, Scope Adaptor E2000 APC	OPT668A
Option, Scope Adaptor E2000 PC	OPT670
Option, Scope Adaptor MPO/MTP 16 x n (for x200 scope only)	OPT674
Option, Scope Adaptor MPO/MTP 16 x n, APC (for x200 scope only)	OPT674A
Option, Scope adaptor MPO/MTP 12 x n (for x200 scope only)	OPT677
Option, scope adaptor MPO/MTP 12 x n, APC (for x200 scope only)	OPT678
Option, Scope Adaptor SMA	OPT679
Option, Scope adaptor 2.5 mm Universal	OPT681
Option, Scope adaptor 2.5 mm Universal, APC	OPT681A ³
Option, Scope adaptor 1.25mm Universal	OPT682
Option, Scope adaptor 1.25 mm Universal, APC	OPT682A ³
Option, Scope adaptor converter to 7/8 UN-28 TPI, female	OPT683 ⁴

Please enquire for other adaptor styles.

Note 2: APC adapter with specific connector type.


Note 3: Suitable for all 1.25 mm or 2.5 mm APC fibers. However, use APC adapter with specific connector type as a better solution where possible.

Note 4: OPT683 fits various common male scope adaptors with a 7/8 UN-28 TPI thread, e.g. JDSU/ Westover FMA Series, Lumen etc.



AUTHORIZED DEALER

History Record

Revision	Date	Editor	Change Description
28	14/3/2017	TO Ng	<p>1. Added text description of x80 scope option on page 2.</p> <p>2. Added part number KI6609 in ORDERING INFORMATION table.</p> <p>3. Added image of POF end-face under 40x magnification in "coaxial illumination" section.</p> <p>Reason for the changes:</p> <p></p> <p>RE POF Scope needs brochure spe</p>

AUTHORIZED DEALER