PbSe near-infrared detector Multi-Single-Pixel thin-film encapsulated



A brand of BASF – We create chemistry

Features


- Wire-bonded on PCB
- High durability for rugged operation
- Room temperature operation

Applications

- Spectroscopy
- Gas detection and analysis
- Flame monitoring
- Flame and spark detection
- Temperature measurement
- Moisture measurement
- Rapid prototyping

Electrical and optical characteristics per pixel

Type No.	Active area [mm x mm]	Peak responsivity S [V/W]		
		Тур.	Min.	
PbSe010010BC	1 x 1	$4.5 \cdot 10^4$	$2.3 \cdot 10^4$	
PbSe020020BC	2 x 2	4 · 10 ⁴	2 · 10 ⁴	
PbSe030030BC	3 x 3	$1.5 \cdot 10^4$	8 · 10 ³	
PbSe060060BC	6 x 6	8 · 10 ³	4 · 10 ³	



- Measured with 500K blackbody
- Measured in a voltage divider circuit with 50 V/mm
- Photo responsivity and detectivity are measured with constant load resistance (RL = 1 $M\Omega$) and calculated for matched resistance

Element	Peak wave-	20% cut-off	Peak D*		Time	Dark
temperature	length λ _P	wavelength λ _C	(620 Hz, 1 Hz)		constant [µs]	resistance R _D
[°C]	[µm]	[µm]	[cm·Hz½/W]			[MΩ]
	Тур.	Тур.	Тур.	Min.	Тур.	
22	3.8	4.5	1.8 · 10 ¹⁰	1.2 · 10 ¹⁰	4	0.1 - 3

Mechanical characteristics

Number of lines 1 - 3
 Number of pixels 2 - 8
 Minimum pixel width 1000 μm
 Minimum pixel height 1000 μm

Please contact us for an individual design: info@hertzstueck.de



PbSe near-infrared detector Multi-Single-Pixel thin-film encapsulated



Storage

- Storage temperature: -55°C to +90°C
- Exposure to UV light results in permanent damage
- Prolonged exposure to visible light results in temporary low dark resistance


Handling

- Active area is scratch sensitive, protect top surface from any mechanical contact
- Ensure dust-free environment for device handling
- Operating temperature: -30°C to +90°C

Options

- Individual housing
- Integrated filters
- Individual PCB
- Evaluation Kit available

Exemplary circuit

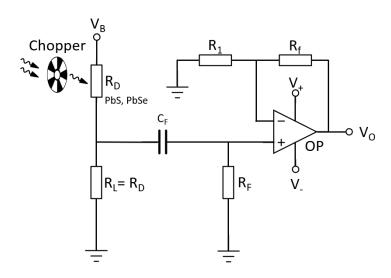

V_R: Bias voltage

V_o: Output voltage

R_D: Dark resistance of the detector

R_L: Load resistor

C_F: Filter capacitor

R_□: Filter resistor

R_f: Feedback resistor

R₁: Gain resistor

Regulatory

For the use of Hertzstück™ PbS and PbSe infrared photodetectors in medical devices, monitoring and control instruments and consumer applications RoHS exemptions apply.

For automotive applications Hertzstück™ PbS and PbSe infrared photodetectors fall under ELV exemption.

