

HIGH POWER FIBER-COUPLED LED LIGHT SOURCES

Mightex FCS-series fiber-coupled LED light sources employ the latest high-power LED technologies and a proprietary coupling optics to achieve maximum optical output power. Optical output is coupled into a fiber through a standard SMA fiber adaptor port (SMA fiber patch cords are sold separately). FCS series also features a locking electrical connector for secured connection. FCS series are designed as a universal light source for general lab use and OEM applications. The one-piece machined housing features multiple mounting holes. All Mightex LED drivers such as the SLC series or other LED drivers and current sources can be used to drive the light sources.

FEATURES

- High-power UV/VIS/NIR/white fiber-coupled LEDs
- Interchangeable fiber with SMA connector
- No moving parts in optical path
- Multiple mounting features for lab and OEM applications
- Optional LED controllers
- Compact, machined metal housing with integrated heat sink
- Locking electrical connector

APPLICATIONS

- Microscopy
- Fluorescence
- Sensors
- Semiconductor equipment
- Testing instruments
- Medical instruments
- Machine vision

PERFORMANCE SPECIFICATIONS

Type A FCS | passive cooling



| Part Number | Description | Nominal Wavelength (nm) | I _{op} (mA) | V _{op} (V) | Typical Radiant Flux ^{1,2} (mW) With 400µm 0.22NA Fiber | Typical Radiant Flux² (mW) With 400µm 0.39NA Fiber |
|--------------|---------------|-------------------------|----------------------|---------------------|---|---|
| FCS-0000-000 | Cool White | 5,500K | 1000 | 3.9 | 3.2 | 10.1 |
| FCS-0001-000 | Warm White | 4,000K | 1000 | 3.9 | 3.2 | 10.1 |
| FCS-0002-000 | Glacier White | 6,500K | 1000 | 3.6 | 3.2 | 10.1 |
| FCS-0003-000 | Warm White | 3,000K | 1000 | 2.8 | 2.8 | 8.8 |
| FCS-0265-000 | Deep UV | 265 | 350 | 6.3 | 100µW | N/A |
| FCS-0280-001 | Deep UV | 280 | 500 | 5.8 | 400μW | N/A |
| FCS-0285-001 | Deep UV | 285 | 500 | 5.8 | 450µW | N/A |
| FCS-0300-000 | Deep UV | 300 | 500 | 6 | 300µW | N/A |
| FCS-0310-001 | Deep UV | 310 | 500 | 5.8 | 360µW | N/A |
| FCS-0325-001 | Deep UV | 325 | 500 | 5.4 | 220µW | N/A |
| FCS-0340-001 | Deep UV | 340 | 500 | 4.3 | 0.6 | 1.1 |



High Power Fiber-Coupled LED Light Sources



Type A FCS | continued

| Part Number | Description | Nominal Wavelength (nm) | I _{op} (mA) | V _{op} (V) | Typical Radiant Flux ^{1,2} (mW) With 400µm 0.22NA Fiber | Typical Radiant Flux² (mW) With 400µm 0.39NA Fiber |
|--------------|--------------------|-------------------------|----------------------|---------------------|---|---|
| FCS-0365-001 | UV 365nm | 365 | 1000 | 3.65 | 5.8 | 18 |
| FCS-0380-000 | UV 380nm | 380 | 1000 | 3.2 | 2.8 | 5.6 |
| FCS-0385-001 | UV 385nm | 385 | 1000 | 3.65 | 5.8 | 18 |
| FCS-0390-000 | UV 390nm | 390 | 1000 | 3.1 | 5.8 | 11.6 |
| FCS-0395-000 | UV 395nm | 395 | 1000 | 3.1 | 6.2 | 12.4 |
| FCS-0400-000 | UV 400nm, 1W | 400 | 350 | 3.5 | 0.8 | 2.5 |
| FCS-0400-001 | UV400nm, 4W | 400 | 1000 | 4.1 | 3.5 | 10.5 |
| FCS-0405-000 | UV405nm | 405 | 1000 | 3 | 7.5 | 15 |
| FCS-0410-000 | UV410nm | 410 | 1000 | 3 | 7.3 | 14.6 |
| FCS-0415-000 | UV415nm | 415 | 1000 | 3 | 7.2 | 14.4 |
| FCS-0430-000 | 430nm | 430 | 500 | 3.8 | 2.9 | 5.8 |
| FCS-0455-000 | 455nm | 455 | 1000 | 3.9 | 7 | 22 |
| FCS-0470-000 | 470nm | 470 | 1000 | 3.9 | 7 | 14 |
| FCS-0471-000 | 471nm | 471 | 350 | 3 | 2.1 | 4.2 |
| FCS-0490-000 | 490nm | 490 | 350 | 3.5 | 3.2 | 6.4 |
| FCS-0505-000 | 505nm | 505 | 1000 | 3.9 | 3.5 | 11 |
| FCS-0530-000 | 530nm | 530 | 1000 | 3.9 | 3.5 | 11 |
| FCS-0560-000 | 560nm broadband | 560 | 700 | 2.9 | 5.5 | 11 |
| FCS-0590-000 | 590nm | 590 | 1000 | 3.2 | 1.2 | 3.8 |
| FCS-0617-000 | 617nm | 617 | 1000 | 3 | 6.5 | 20 |
| FCS-0625-000 | 625nm | 625 | 1000 | 3 | 6.5 | 20 |
| FCS-0656-000 | 656nm | 656 | 1000 | 3.1 | 6.5 | 20 |
| FCS-0657-000 | 657nm | 657 | 350 | 2.4 | 1 | 3.1 |
| FCS-0680-000 | 680nm | 680 | 600 | 2.7 | 1.4 | 4.4 |
| FCS-0700-000 | 700nm | 700 | 500 | 2.1 | 0.6 | 1.2 |
| FCS-0720-000 | 720nm | 720 | 600 | 2.2 | 0.9 | 1.8 |
| FCS-0740-000 | 740nm | 740 | 1000 | 2.9 | 3.6 | 11 |
| FCS-0780-000 | NIR 780nm | 780 | 800 | 2.5 | 2.2 | 6.9 |
| FCS-0810-000 | NIR 810nm | 810 | 800 | 2.2 | 1.5 | 3 |
| FCS-0850-000 | NIR 850nm | 850 | 1000 | 2.1 | 4 | 12.6 |
| FCS-0870-000 | NIR 870nm | 870 | 700 | 1.9 | 1.4 | 4.4 |
| FCS-0910-000 | NIR 910nm | 910 | 1000 | 1.9 | 1.5 | 4.7 |
| FCS-0940-000 | NIR 940nm | 940 | 1000 | 2.4 | 4 | 12.6 |
| FCS-0980-000 | NIR 980nm | 980 | 500 | 1.4 | 0.4 | 0.8 |

¹ Measured with a 400μm core 0.22 numerical aperture (NA) fiber. Output optical power scales approximately linearly with fiber core area and NA². For example, with a 400μm core 0.39NA fiber, the output power will be 3.14X for VIS/IR LEDs and 1.8X for DUV LEDs (due to smaller chip size), as shown in the last column above.



² Due to variations in the manufacturing process and operating parameters such as temperature and current, the actual output of any given LED may vary. Specifications are intended to be used as a guideline.



Type B FCS | fan cooling



| Part Number | Description | Nominal Wavelength (nm) | I _{op} (mA) | V _{op} (V) | Typical Radiant Flux ^{1,2,3} (mW) With 400µm 0.22NA Fiber | Typical Radiant Flux ^{2,3} (mW) With 400µm 0.39NA Fiber |
|--------------|-----------------|-------------------------|----------------------|---------------------|---|---|
| FCS-0470-100 | Blue | 470 | 3000 | 4.6 | 11 | 21 |
| FCS-0530-100 | Green | 530 | 2400 | 4.9 | 8 | 15 |
| FCS-0540-100 | Broadband Green | 540 | 3000 | 4.6 | 10 | 20 |
| FCS-0625-100 | Red | 625 | 2400 | 2.9 | 9 | 22 |

¹ Measured with a 400μm core 0.22 numerical aperture (NA) fiber. Output optical power scales approximately linearly with fiber core area and NA². For example, with a 400μm core 0.39NA fiber, the output power will be 3.14X for VIS/IR LEDs and 1.8X for DUV LEDs (due to smaller chip size), as shown in the last column above.

Type H FCS | super high-power, fan cooling

| Part Number | Description | Nominal Wavelength (nm) | I _{ор} (А) | V _{op} (V) | Typical Radiant Flux ^{1,2,3} (mW) With 1000µm 0.22NA Fiber | Typical Radiant Flux ^{2,3} (mW) With 1000µm 0.39NA Fiber |
|--------------|---------------|-------------------------|---------------------|---------------------|--|--|
| FCS-0365-200 | UV | 365 | 12 | 4 | 60 | 180 |
| FCS-0405-200 | UV | 405 | 13 | 3.8 | 70 | 210 |
| FCS-0470-200 | Blue | 470 | 13 | 3.8 | 90 | 280 |
| FCS-0525-200 | Green | 525 | 13 | 4.6 | 50 | 160 |
| FCS-0625-200 | Red | 625 | 13 | 2.9 | 40 | 130 |
| FCS-6500-200 | Glacier White | 6500K | 9 | 3.7 | 60 | 180 |

 $^{^{1}\,\}text{Measured with a 1000}\mu\text{m core 0.22 numerical aperture (NA) fiber.}\,\text{Output optical power scales approximately linearly with fiber core area and NA}^{2}.$

³ Due to variations in the manufacturing process and operating parameters such as temperature and current, the actual output of any given LED may vary. Specifications are intended to be used as a guideline.





² Maximum CW output achievable with a BLS-3000-2 BioLED control module.


³ Due to variations in the manufacturing process and operating parameters such as temperature and current, the actual output of any given LED may vary. Specifications are intended to be used as a guideline.

²Maximum CW output achievable with a BLS-13000-1E BioLED control module.




LED SPECTRA



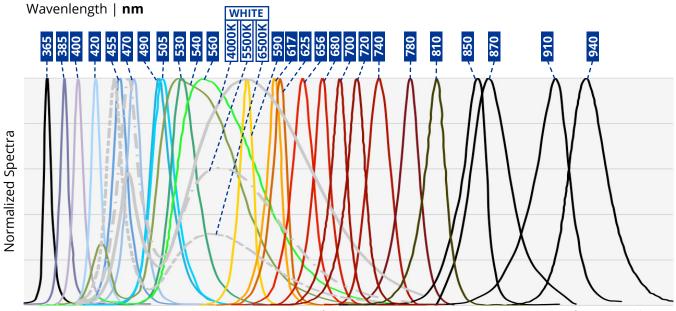

New LED wavelengths are continually added to the portfolio. Please visit www.mightexsystems.com for updated list.



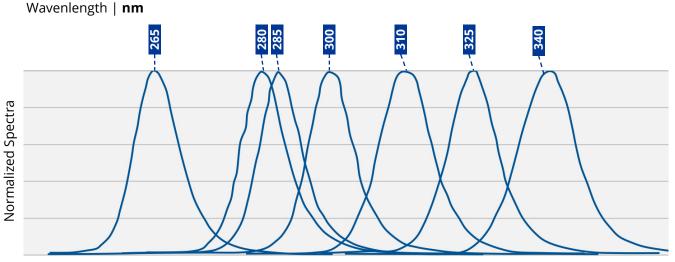


New LED wavelengths are continually added to the portfolio. Please visit www.mightexsystems.com for updated list.






ELECTRICAL PIN LAYOUT




INSTALLATION DRAWINGS

Installation Drawing for FCS Fiber-Coupled LED, Type-A

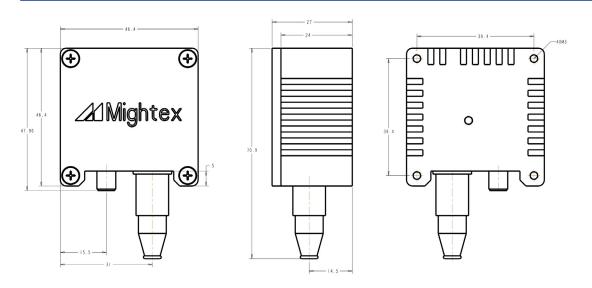


Installation Drawing for FCS Fiber-Coupled LED, Type-B

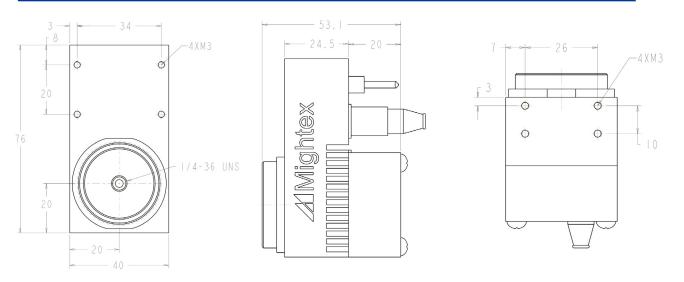






Installation Drawing for FCS Fiber-Coupled LED, Type-H

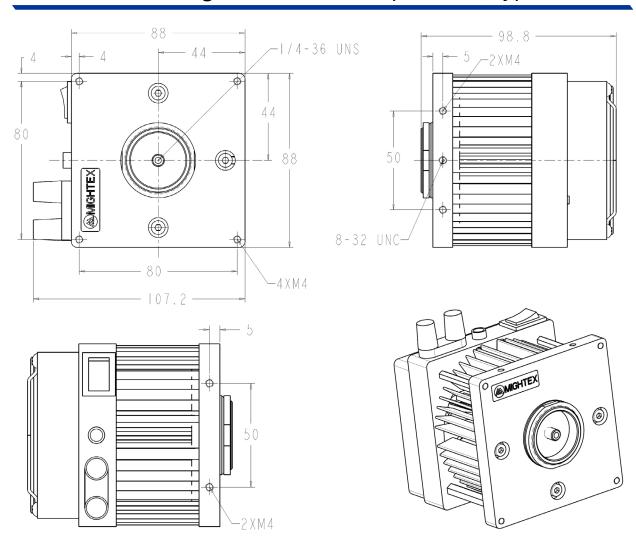

PART NUMBER AND ORDERING INFORMATION

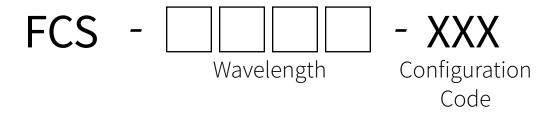

For example, FCS-0470-000 is a 470nm fiber-coupled light source with SMA fiber adaptor.

With a world-class OEM design team, Mightex offers a broad range of customized solutions in order to meet individual customer's unique requirements. Please call **1-925-218 1885** or email **sales@mightex.com** for details.





ORDER NOW

Our primary goal is to help you find the optimal solution for your application. We have a dedicated technical support and sales team committed to providing guidance on our LED illumination and other Mightex products.



Please visit www.mightexsystems.com

for more information!

CONTACT US

US OFFICE

1241 Quarry Lane, Suite 105 Pleasanton, CA 94566 USA

TEL: 1-925-218-1885

CANADA OFFICE

111 Railside Road, Suite 201 Toronto, ON M3A 1B2 Canada

TEL: 1-416-840-4991



