

SPECIFICATIONS

AO Medium	TeO2	
Acoustic Velocity	4.2 mm/μs	
Active Aperture*	2.5 mm 'L' X	0.6 mm 'H'
Center Frequency (Fc)	110 MHz	
RF Bandwidth	24 MHz @	-10 dB Return Loss
Input Impedance	50 Ohms Nominal	
VSWR @ Fc	1.3 :1 Max	
Wavelength	442-633 nm	
Insertion Loss	4 % Max	
Reflectivity per Surface	1 % Max	
Anti-Reflection Coating	MIL-C-48497	
Optical Power Density	250 W/mm ²	
Contrast Ratio	1000 :1 Min	
Polarization	90 ° To Mounting Plane	

PERFORMANCE VS WAVELENGTH

Wavelength (nm)	442	488	515	633
Saturation RF Power (W)	0.29	0.39	0.43	0.65
Bragg Angle (mr)	5.8	6.4	6.7	8.3
Beam Separation (mr)	11.6	12.8	13.4	16.6

PERFORMANCE VS BEAM DIAMETER


Beam Diameter (μm) at Wavelength (nm)	113	130	200	500
Diffraction Efficiency (%)	70	75	80	83
Rise Time (nsec)	25	28	39	86
Modulation Bandwidth	28	24	15.8	6.3
	20	10	5	1

**For Reference
Only**

*Active Aperture: Aperture over which performance specifications apply.

Outline Drawing:

Package Style 2

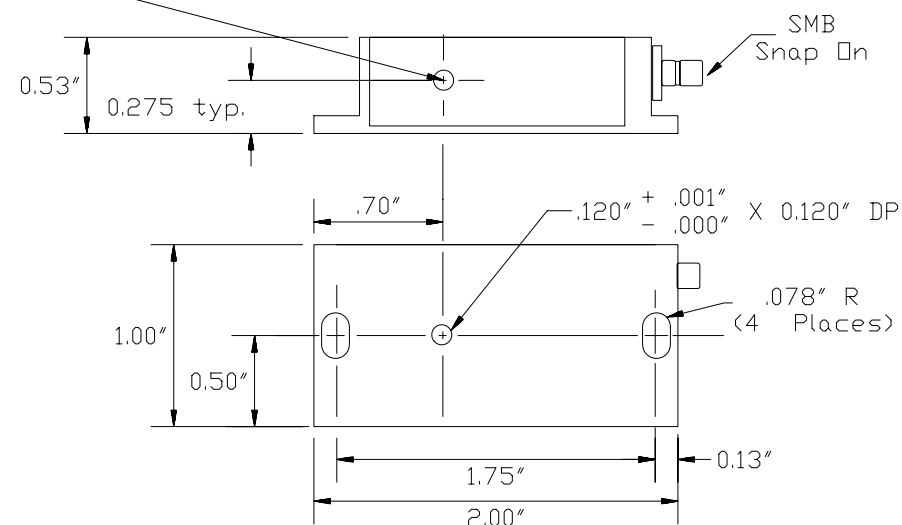

info@amstechnologies.com
www.amstechnologies-webshop.com

Contact us

Notes:

THIS DOCUMENT IS THE PROPERTY OF CRYSTAL TECHNOLOGY, INC. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES CRYSTAL TECHNOLOGY AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTORS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF CRYSTAL TECHNOLOGY.

TOLERANCES: .XX ± .01 .XXX ± .005	DR	A. Campi 6/17/2002	Crystal Technology, Inc.		
MATERIAL:	CHK		DESCRIPTION: AOMO 3110-120		
FINISH:	APP				
	APP		PART NUMBER: 99-20068-01	REV: B	SHEET 1 OF 1