


SPECIFICATIONS

AO Medium	TeO2
Acoustic Velocity	.68 mm/μs
Active Aperture*	2.5 mm Dia
RF Frequency Range	25-50 MHz
RF Bandpass (FWHM)	280 KHz @ 1550 nm
Wavelength Range	1100-2000 nm
VSWR	2.4 :1 Max
Input Impedance	50 Ohms Nominal
Insertion Loss	3 % Max
Temperature Sensitivity	0.05 nm/C
Diffraction Beam Collinearity, min deviation	0.01 degrees
Input Optical Polarization	Vertical
Output Optical Polarization	Horizontal
Max RF Power	2W

Outline Drawing:

Package 97-02986-01

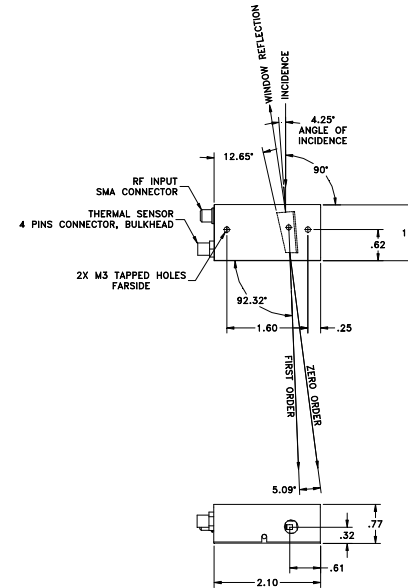

Document
12/09/13
Control

info@amstechnologies.com
www.amstechnologies-webshop.com

Notes:
Simultaneous Diffraction, multi frequency capable.
Random Wavelength Access Time: < 1.5 usec (1 mm Beam Diameter)
Max RF Power with 8 Simultaneous Frequencies = 2W

Special Testing	Min	Units	Max
Diffraction Efficiency (per wavelength input divergence < 2 mrad)	90	%	

THIS DOCUMENT IS THE PROPERTY OF GOOCH AND HOUSEGO. IT IS NOT TO BE REPRODUCED OR DISCLOSED IN WHOLE OR IN PART OTHER THAN BY EMPLOYEES GOOCH AND HOUSEGO AND ITS CONTRACTED REPRESENTATIVES AND DISTRIBUTERS. ANY EXCEPTION REQUIRES THE WRITTEN CONSENT OF AN AUTHORIZED REPRESENTATIVE OF GOOCH AND HOUSEGO.

TOLERANCES: .XX ± .01 .XXX ± .005	DR	Tom NG 11/22/2013	<p>DESCRIPTION: AOTF PCAOM N.I.R 2 25-50MHz Vert. Pol.</p>
MATERIAL:	CHK		
FINISH:	APP		
	APP		PART NUMBER: 97-02996-01
			REV: C
			SHEET 1 OF 1

*Active Aperture: Aperture over which performance specifications apply.